

## Applicability research of smart camera for the application of Unmanned Aerial Vehicle(UAV)

HoHyun Jeong<sup>a</sup>, Hoyong Ahn<sup>a</sup>, Dong Yoon Shin<sup>a</sup>, Chuluong Choi<sup>a,CA</sup>

<sup>a</sup> Department of Spatial Information Engineering, Pukyong National University, 45 Yongso-ro, Nam-gu, Busan, South Korea

### Introduction

The existing camera was not able to perform prompt image processing without having dedicated processor. In addition, as the high-resolution digital image got accessible, the technology of digital camera ranging from computer vision to such specialized area as digital photogrammetry has been applied in many ways. (Hwan-hee Yoo etc, 2003). However, most commercial digital camera is not designed for digital photogrammetry, what is important is when using it for measurement, is the lens Calibration. (Seong-su Jeong etc, 2008). Camera calibration is required in order that lens Calibration.

The research is to evaluate the recently issued camera that provides high-resolution image among different sensors built in smart camera to suggest applicability of the smart camera image on photogrammetry. Samsung NX smart camera was used and the operation with TLS and GPS were performed for the evaluation. Before that, Camera calibration were proceeded by priority for lens calibration, and in this process, calculation result according to correction factor of lens distortion were compared and analyzed to evaluate relative accuracy of smart camera. Also, UAV with a built-in smart camera raised the quality of secured data by manufacturing dust-proof to minimize vibration transferred from UAV for accurate image obtention.

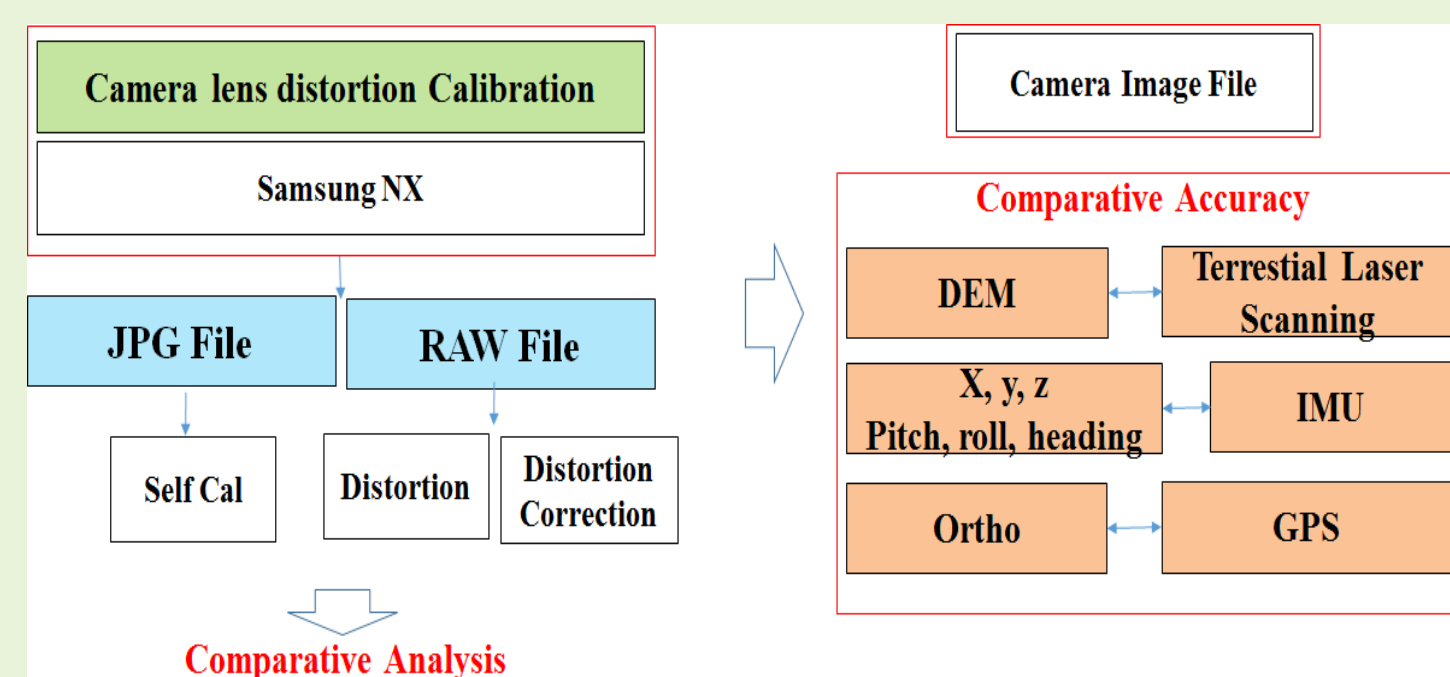


Figure 1. Flow Chart

The purpose of the thesis is to evaluate applicability of the image by UAV with a built-in smart camera to examine generation of DEM according to the correction of camera distortion. A pair of the secured image goes through triangulation process for geometric correction. This process is dividedly proceeded with the case of concerning camera calibration data, and the case without concerning. Accuracy evaluation on each case is also undertaken. At this time differences in the result according to camera calibration data, and orthoimage is created through orthometric correction process utilizing DEM by TLS technique, and its accuracy is estimated by check point. It is also evaluated by comparing between TLS and DEM.

### Method

Before equipping with UAV, the distortion correction process by smart camera is as follow. First, evaluate correction factor of smart camera's lens distortion through camera calibration, and then, image is secured through UAV by smart camera, the image provided in such way is triangulated by the precise Ground Control Points(GCPs) according to distortion correction, each 6 exterior orientation parameters( $X, Y, Z, \omega, \phi, \kappa$ ) of each camera is also determined. Accuracy evaluation is performed through various analysis and the secured image. At the end, the triangulated images turn into orthoimage going through orthometric correction. The orthoimage is expressed the coordinate of actual object.

Category	Specification
Model	X8+
UAV	Multirotor
Autopilot	Pixhawk v2.4.5 / ArduCopter 3.2
GPS	3DR u-blox GPS with Compass
Ground Station Radio	3DR Data Radio (433 MHz)
Motors	SunnySKY V2216-12 KV800 II
Propellers	8 (APC Propeller 11X4.7 SF(4), SFP(4))
Size and weight	Size: 35cm X 51cm X 20cm, Weight: 2.56kg
Flight time	12 ~ 15 minute
Take off/landing	auto / manual
Payload	800g

Table 1. Specification of UAV


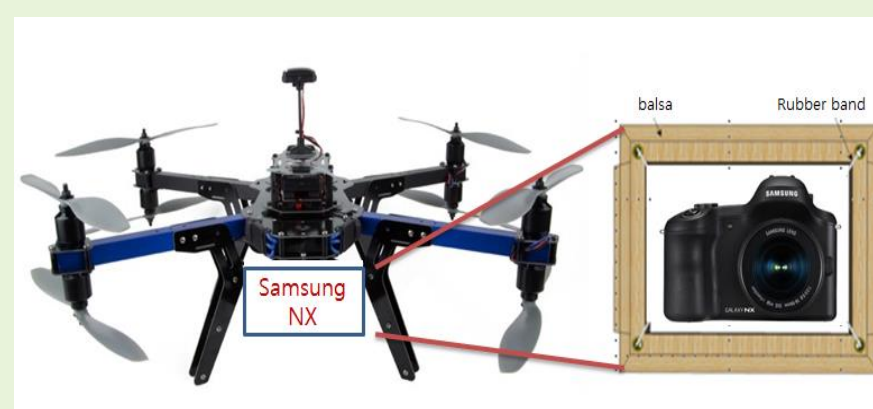


Figure 2. A dustproof device designed in order to reduce high frequency vibration from UAV(X-8 Copter)

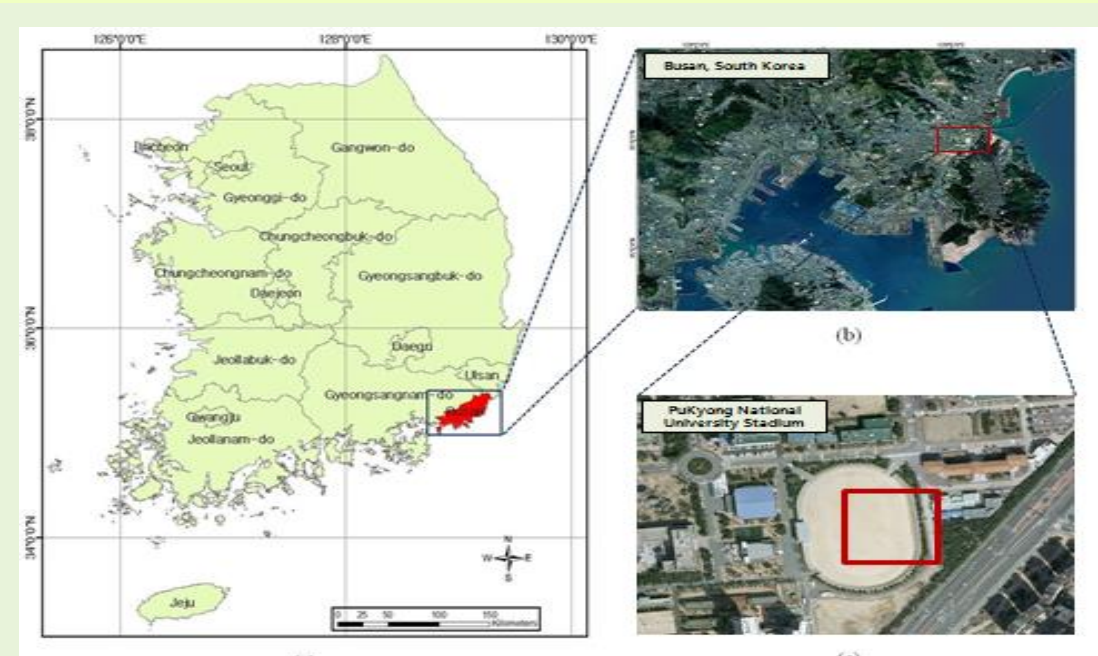

Field experiment was proceeded in the schoolyard of Pukyong National University located to Busan Metropolitan City, in the southeast (Figure 3).

Figure 3. Field Experiment Area

UAV(X8+), Smart camera (Samsung NX), GPS receiver 3D laser scanner were used. Figure 4. shows the arrangement of equipment for the research and flight path

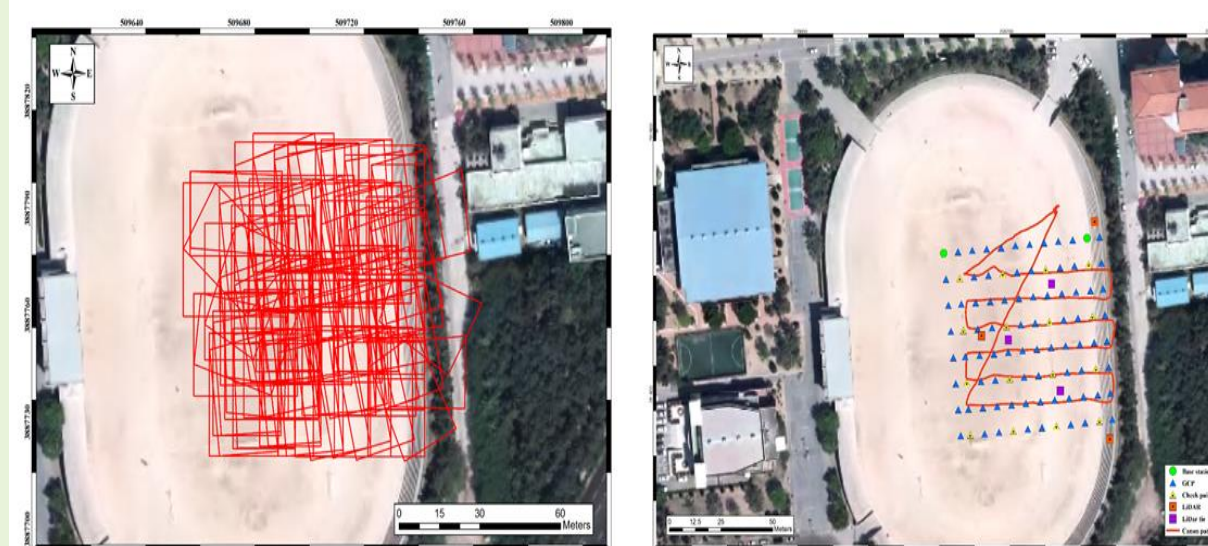


Figure 4. Flight path and Equipment point

### Results

Different camera models have been formulated and used in photogrammetry, but generally sensor orientation and calibration is performed with a perspective geometrical model by means of the bundle adjustment(Brown, 1971).

#### Camera Calibration

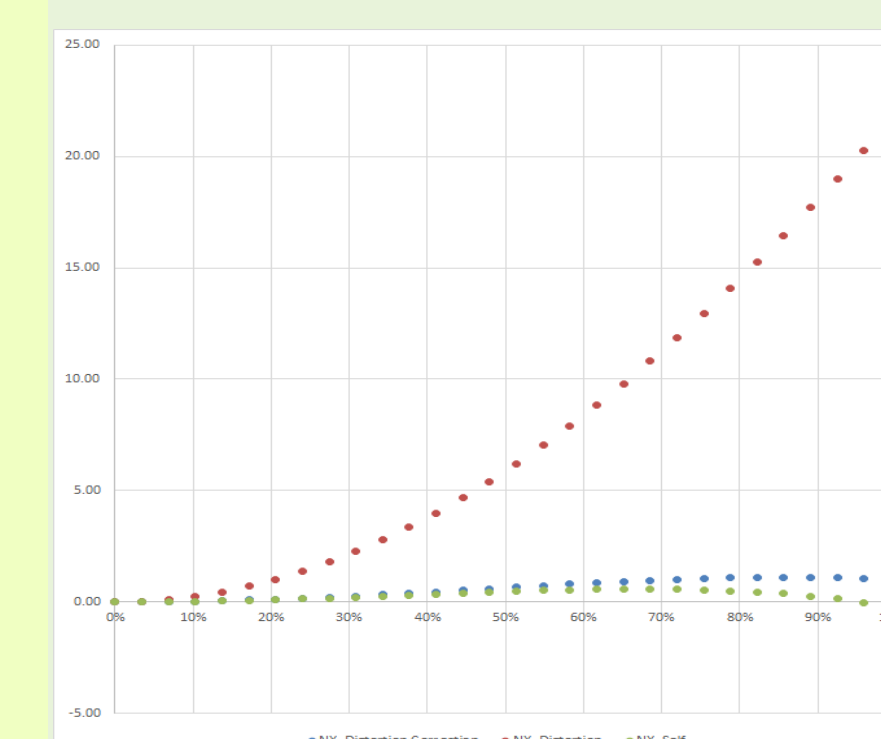


Figure 5. Radial Lens Distortion

The camera used in this research was Samsung NX Camera which showed less lens distortion on the image by self-correction according to the result of camera calibration. And the image through camera calibration, lens distortion similar to the self-corrected image was found when correcting not the already-corrected image(jpg) in securing, but an original file(raw), however it was also known that without any correction, there was also as many as 20 times of lens distortion (Figure. 5)

#### Comparative Accuracy

$\phi, \theta, \psi$  estimated directly through result of accelerometer and magnetometer built in UAV or provided by gyroscope in smart camera were compared to  $\omega, \phi, \kappa$  (rotation element of each image) estimated in the triangulation process with ERDAS Imagine Photogrammetry project manager.  $\omega, \phi, \kappa$  had different reference coordinate from  $\phi, \theta, \psi$  to compare both element  $\omega, \phi, \kappa$  transformed into  $\phi, \theta, \psi$  (Bäumker and Heimes, 2001). As a result, roll and pitch angle's Stdev upon Sensor revealed within about 2.5, heading angle's Stdev was found over 5 deg. Roll and pitch angle's Stdev on the Sensor in UAV was within 2 deg, heading angle's stdev was within about 1 deg In other words, sensor in Smart Camera is less accurate than Sensor in UAV. In addition, in DTM case, with image block, using each image and TLS DTM, utilized every area involved in each orthoimage that is finally made, and created both image-based DTM (0.2m grid) and TLS DTM in the different representative and flat area. The orthoimage regarding this area and image-based DTM created by automatic terrain extraction is the same as Figure 6.

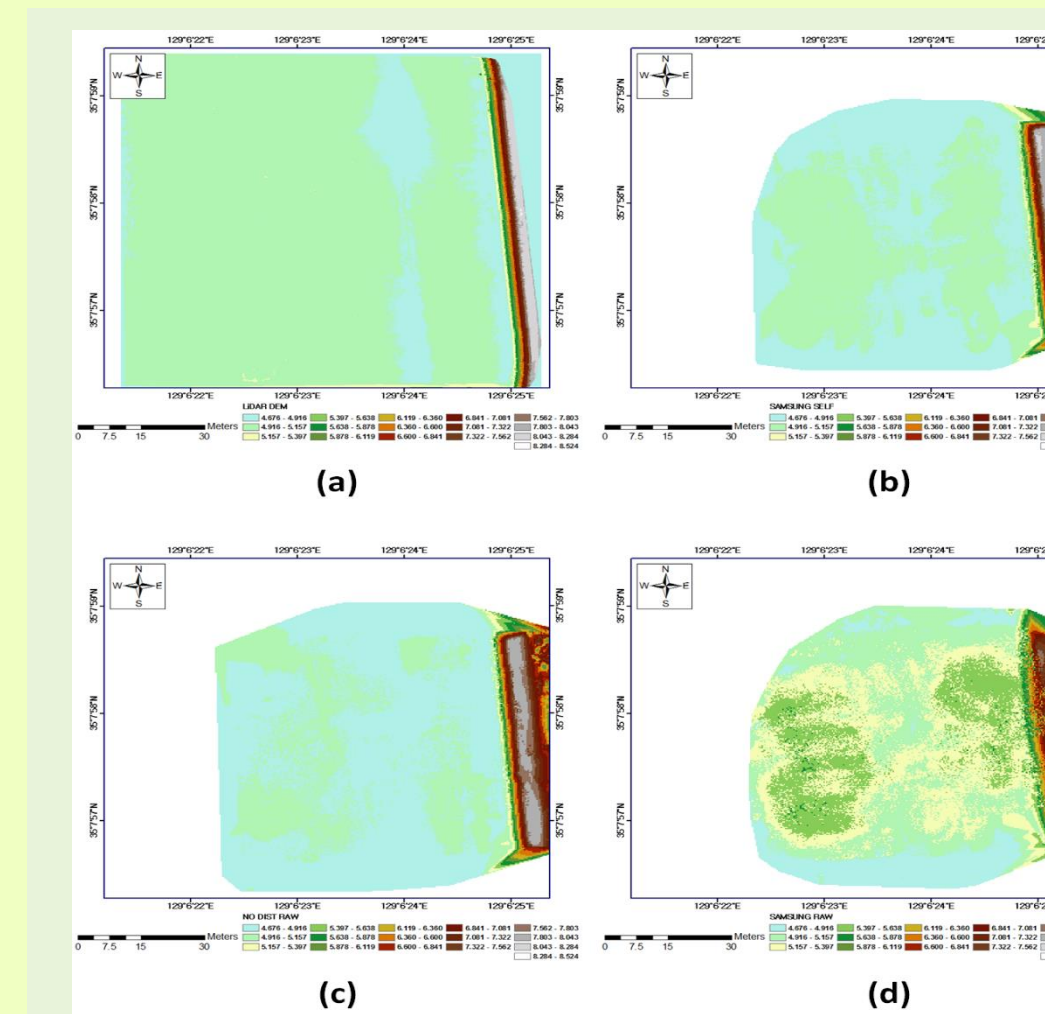


Figure 6 (a) TLS DTM, (b) Camera Self, (c) Camera Raw Distortion correction (d) Camera Raw default

And also, compared the differences between TLS DTM about the same area above and image-based DTM (Table 2).

Unit : m	Samsung NX			
	JPG <sup>5)</sup>	Raw <sup>6)</sup>	Raw <sup>4)</sup>	
DTM Statistic	Min	4.721	4.730	4.630
	Max	5.046	5.037	5.791
	Mean	4.927	4.901	5.264
	Stdev	0.038	0.033	0.164
Residual by TLS <sup>1)</sup> Statistic	Min	-0.158	-0.126	-0.895
	Max	0.177	0.162	0.296
	Mean	-0.021	0.006	-0.357
	Median	-0.022	0.003	-0.350
	Mode	-0.019	-0.004	-0.327
Stdev	0.038	0.032	0.165	

Table 2. Extraction DTM and Difference each DTM and TLS DTM Statics

### Discussion

This research was proceeded based on the certain camera(Samsung NX) among smart camera which is expected to have difficulty in application for all sort of the camera. However it is also indicated to secure corrected image with ease through self-correction equipped with the camera as technology improved in contrast with the existing non-metric camera required calibration process to have space information.

### Acknowledgement

This research was financially supported by the Ministry of Education (MOE) and National Research Foundation of Korea (NRF) through the Human Resource Training Project for Regional Innovation (No. 2013H1B8A2027455).